





Output for spring loaded  
30 kV connector (A3713)

- Options:
- HV-cable.
  - silicone HV-cable.
  - flexible silicone HV-cable.

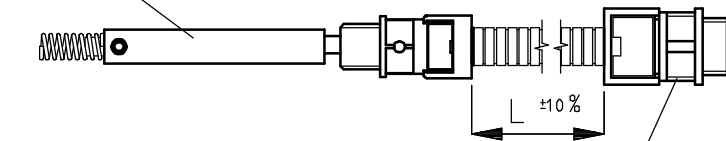

HV-input connected to HV-generator  
Connector type HV-A3713 (part no. 2105000005)

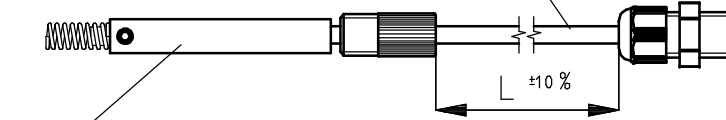

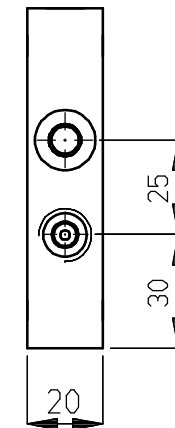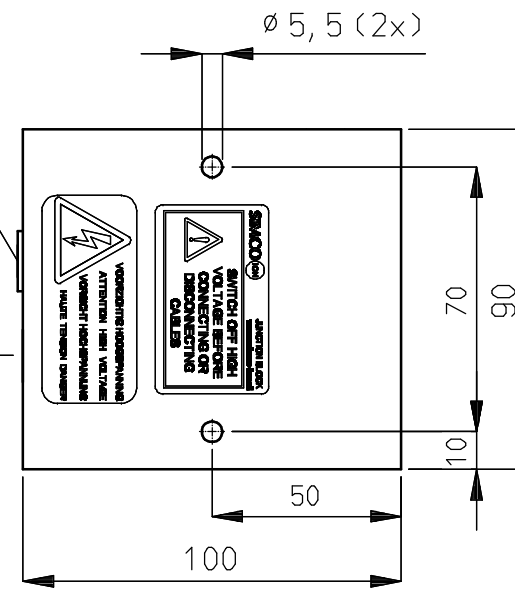- Options:
- protected HV-cable.
  - protection (highly flexible) with flexible silicone HV-cable



Max 30kV

 An ITW Company www.simco-ion.nl Tel: +31 (0)573 288333	Name: Junction block 1 pas. 30 kV DC					Drawn: AB	Part no.: -
	CAD generated NOT updated	Dimensions in mm	Date: 06-11-2008	A3	M: 1:2	 ECN2011-070	Check: -